

Multimastic FB

Firestop Board

- Multimastic FB1, single-sided coating
- Multimastic FB2, two-sided coating



Fire resistance
≤ 240 minutes



Acoustic insulation
Rw 55 dB



Working life
25 years



Applicability
Can be used outdoors

Firestop Board

Multimastic FB1 and Multimastic FB2 are firestop boards made of a high-density rock wool core, treated with Multimastic C firestop coating on one or both sides. Multimastic FB firestop boards make it possible to seal off larger openings, creating a fire-resistant and smoke-proof seal to adjacent rooms.

Multimastic FB firestop boards form part of the Mulcol® Penetration Seal System. Multimastic FB firestop boards can also be used in combination with the Multimastic SP firestop mastic and Multimastic C firestop coating.

Advantages

- ✓ CE-certified
- ✓ Easy to install
- ✓ Environmentally and user-friendly
- ✓ No trimming required in the case of stucco walls
- ✓ Very high acoustic insulation
- ✓ Permanently flexible
- ✓ Can be used outdoors (ask for the conditions)
- ✓ Water and frost-resistant

Applications

- ✓ Rigid floors
- ✓ Rigid walls
- ✓ Flexible walls

- ✓ Opening size floors: 1200 x 2400 mm
- ✓ Opening size walls: Unlimited length x 1200 mm

Technical data

Colour	White surface, green core
Application temperature	+5 °C to +50 °C
Temperature resistance	-30 °C to +80 °C
Density	~ 160 kg/m ³
Reaction to fire	Class A1 in accordance with EN 13501-1

Packaging

	Panel thickness	Dimensions	Pallet	Article number
Multimastic FB1	50 mm	1000 x 625 mm	60 pieces	204001051
Multimastic FB2	60 mm	1000 x 625 mm	50 pieces	204001062



Technical documents available

- ✓ Product Data Sheet (PDS)
- ✓ Technical Data Sheet (TDS)
- ✓ Safety Data Sheet (SDS)
- ✓ Installation Manual
- ✓ EC certificate 0843-CPR-0335
- ✓ Emission reports
- ✓ Acoustic report no. BMT/MTZ/F13079/03/AR1

Approvals

- ✓ Tested in accordance with EN 1366-3 / EN 1366-4
- ✓ Classification in accordance with EN 13501-2
- ✓ Certified in accordance with ETAG 026-2 / ETAG 026-3
- ✓ ETA report 16/0985 and ETA 16/0563
- ✓ Declaration of Performance (DoP) no. PSS-FB 0843-CPR-0335

The above documents are available from your Mulcol contact person or via www.mulcol.com

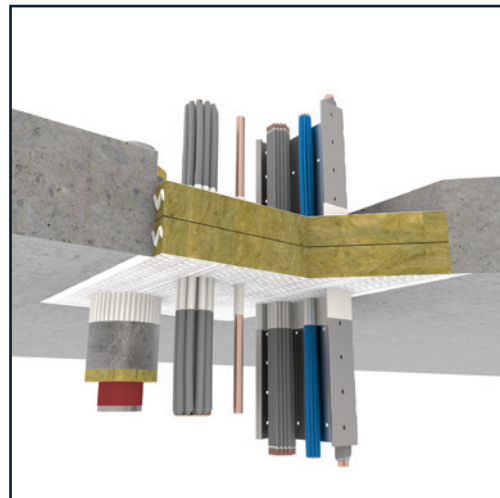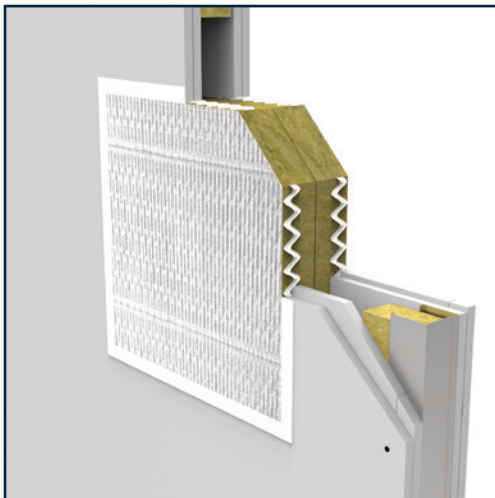

Mulcol International composed the technical data on this sheet with great care and reserves the right to change product properties without prior notification. The user of this data remains responsible at all times for the correct application thereof. In the event of a lack of clarity or doubt, we recommend consulting Mulcol International to confirm that this data complies with the required application.

