



MULCOL
FIRE PROTECTION

Mulcol[®] Multicollar *Slim* 120 minutes fire resistant

Technical Advice **Multiselector** Penetration seal

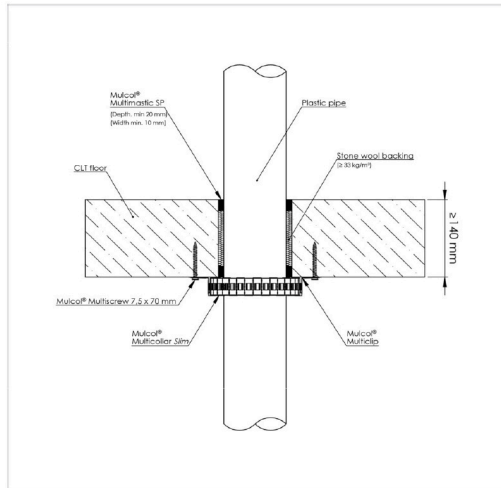

- 1 **Floor**
CLT floor ≥ 140 mm
- 2 **Seal**
Tight fit or maximum annular space of 40 mm
- 3 **Penetration**
PVC-U / PVC-C pipe $\leq \varnothing 110$ mm, wall thickness 3,2 to 8,1 mm
- 4 **Fire protection product 1**
Single Multicollar Slim, placed at the bottom of the floor
- 5 **Joint sealing**
Multimastic SP, ≥ 10 x ≥ 20 mm (wxd)
- 6 **Backing**
Stone wool backing of 33 kg/m³, depth 100 mm



Fire resistant
From the underside



Classification
 \leq EI 120 U/U



Download report
YA 2746-1E-RA / page 93



Download manual(s)
Multicollar Slim

1 / 3

Mulcol International Postbus 93
The Netherlands 4330 AB Middelburg

T. +31 (0)118 72 61 40
F. +31 (0)118 72 61 45

contact@mulcol.com
www.mulcol.com


Company Reg. No: 65334094
VAT No: NL 8560.69.632 B01

IBAN: NL94 RABO 0317 8332 19
SWIFT: RABONL2U



Mulcol[®] Multicollar *Slim* 90 minutes fire resistant

Technical Advice **Multiselector** Penetration seal

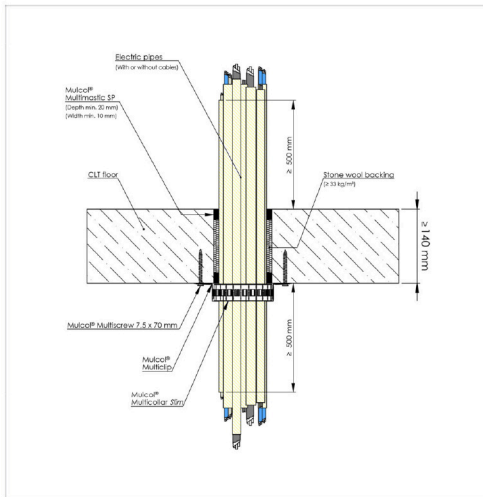


- 1 **Floor**
CLT floor ≥ 140 mm
- 2 **Seal**
Tight fit or maximum annular space of 40 mm
- 3 **Penetration**
PVC conduits $\leq \varnothing 19$ mm with and without electric cables bundled up to $\leq \varnothing 80$ mm
- 4 **Fire protection product 1**
Single Multicollar Slim, placed at the bottom of the floor
- 5 **Joint sealing**
Multimastic SP, ≥ 10 x ≥ 20 mm (wxd)
- 6 **Backing**
Stone wool backing of 33 kg/m^3 , depth 100 mm



Fire resistant
From the underside



Classification
 $\leq \text{EI } 90 \text{ U/U}$, $\leq \text{E } 120 \text{ U/U}$



Download report
YA 2746-1E-RA / page 79



Download manual(s)
Multicollar Slim